




4230

Instruction Manual

Sound Level Calibrator Type 4230

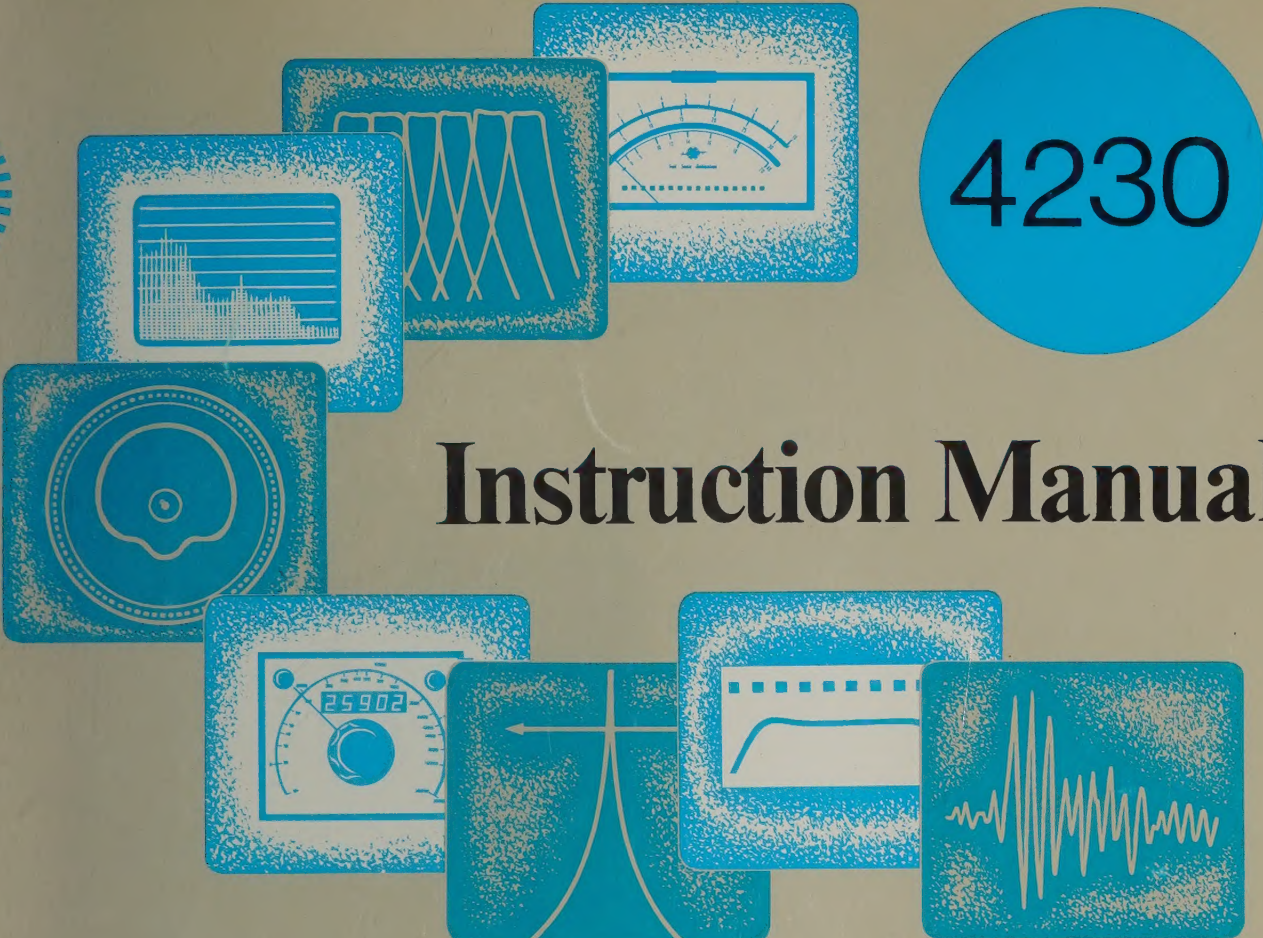

A simple to use, pocket size, acoustic calibrator which gives an accurate sound pressure level of 94 dB at 1000 Hz.



Brüel & Kjær

**SOUND LEVEL CALIBRATOR
TYPE 4230**

Revision November 1980

CONTENTS

1. INTRODUCTION AND SPECIFICATIONS (PRODUCT DATA)	1
2. OPERATION	3
2.1. GENERAL	3
2.2. CALIBRATION PROCEDURE	4
2.3. REPLACEMENT OF BATTERY	4
2.4. LEATHER CASE	5
3. CHARACTERISTICS	6
3.1. INFLUENCE OF TEMPERATURE AND PRESSURE	6
3.2. DESCRIPTION AND EQUIVALENT CIRCUIT	7



Digitized by the Internet Archive
in 2026

https://archive.org/details/manualsplus_12976

type 4230

Sound Level Calibrator

FEATURES:

- Pocket size, portable unit
- Calibration accuracy $\pm 0,3$ dB
- Frequency 1000 Hz, gives independence of weighting networks
- Calibration sound pressure level $94 \text{ dB} = 1 \text{ Pascal} = 1 \text{ N/m}^2 = 10 \mu\text{bar}$
- Extremely small influence of static pressure
- Sound pressure independent of microphone equivalent volume
- Fits B & K 1" and 1/2" microphones

USES:

- Calibration of sound measuring equipment



The Sound Level Calibrator Type 4230 is a pocket sized, battery operated sound source intended for quick and direct calibration of sound level meters and other sound measuring systems. It is designed to fit B & K 1" and 1/2" microphones, but with the correct adaptors it can be used for 1/4" and 1/8" microphones as well.

The calibration frequency is 1000 Hz, (the reference frequency for the standardized international weighting networks), so the same calibration value is obtained for all weighting networks (A, B, C, D and Linear). The calibration pressure of $94 \pm 0,3 \text{ dB re } 2 \times 10^{-5} \text{ N/m}^2$ is equal to 1 Pa or 1 N/m^2 , convenient

for calibration. The principle of operation of the calibrator is shown in Fig.1. A stabilized 1000 Hz oscillator feeds a piezoelectric driver element which vibrates the diaphragm and creates the sound pressure level in the coupler volume. The system is driven at its resonant frequency, at which the equivalent coupler volume is more than 140 cm^3 . The sound pressure is therefore independent of the microphone's volume. This means that the exact fitting of the microphone in the coupler is not critical, an added assurance for non-experts.

The calibration procedure is simple. Fit the 4230 snugly over the microphone (see Fig.2), press the

calibrator's push button and adjust the sensitivity of the sound measuring equipment until the meter indicates the correct sound pressure level. When the push button has been pressed to start the calibration, the signal will last for up to 1 minute depending on the condition of the battery.

Normally, the volume behind the diaphragm would have a certain stiffness which would be pressure dependent and would add to the overall stiffness of the system. This in turn would make the resonant frequency of the system pressure dependent. However, in the 4230 calibrator the volume behind the diaphragm is shaped like a Helmholtz res-

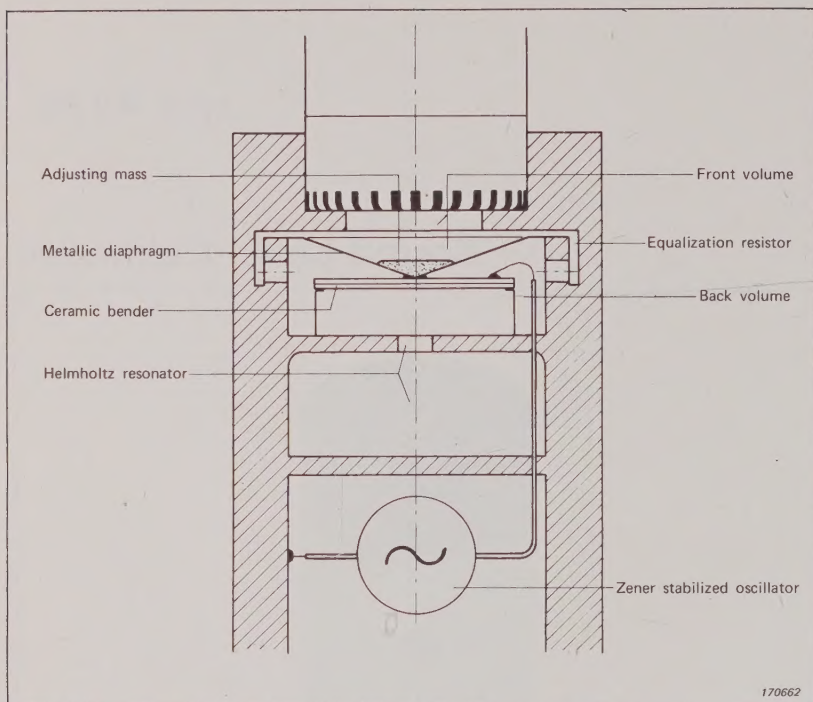


Fig. 1. Principle of operation of the portable Sound Level Calibrator 4230

onator, which eliminates the stiffness factor and makes the resonant frequency independent of ambient pressure. (The resonant frequency of a Helmholtz resonator depends only on the volume of the cavity and the length and cross section of the constricting neck). This

means that the calibrator keeps its good characteristics even at very low static pressures.

The accuracy of calibration is within $\pm 0,3$ dB at 25°C and within $\pm 0,5$ dB over the operating temperature range of 0 to 50°C .

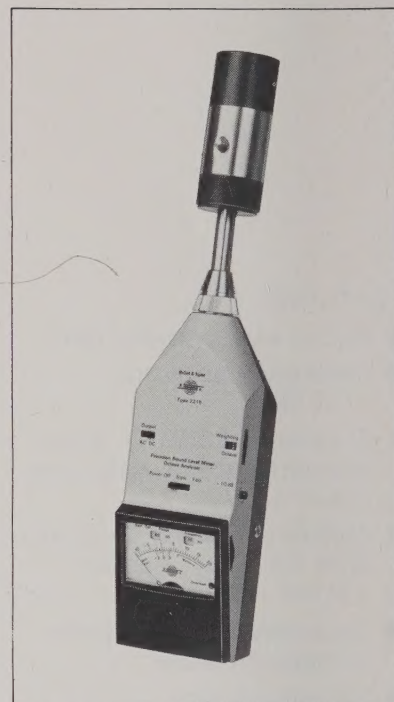


Fig. 2. The 4230 fitted to the Sound Level Meter 2215

The battery condition is easily checked. If the signal stops as soon as the push-button is released, the battery needs replacing.

A leather protecting case which does not need to be removed to use the calibrator is supplied.

Specifications 4230

Sound Pressure Level:

94 dB re. 2×10^{-5} Pa (or 1 Pa)

Accuracy of SPL:

At 1013 mbar when loaded with $1,333 \text{ cm}^3$ (corresponding to B & K microphones with protecting grid, and their respective adaptors)
 $\pm 0,3$ dB at $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$ (68 to 79°F)
 $\pm 0,4$ dB between 10 and 40°C (50 to 104°F)
 $\pm 0,5$ dB between 0 and 50°C (32 to 122°F)

Frequency:

$1000 \text{ Hz} \pm 1,5\%$

Equivalent Coupler Volume:

$|V| > 140 \text{ cm}^3$ at 23°C ($73,4^{\circ}\text{F}$)
 $|V| > 70 \text{ cm}^3$ between 10 and 40°C (50 to 104°F)
 $|V| > 35 \text{ cm}^3$ between 0 and 50°C (32 to 122°F)

Distortion:

$< 1\%$

Influence of Static Pressure:

$\pm 0,05$ dB/100 mbar from 500 mbar to 1100 mbar

Long Term Stability:

Better than $\pm 0,1$ dB/year (expected for normal field use)

Microphone Types:

1" directly
 $1/2"$ with supplied adaptor

Power Supply:

Built-in battery: $1 \times 9 \text{ V}$ (IEC 6F22, NEDA 1604)

Operation:

With a new battery the signal will last for up to one minute after contact is released

Battery Check:

As long as the signal continues for a few seconds after the contact is released the change in SPL is less than 0,05 dB

Dimensions:

(Including leather case)
Length: 115 mm
Diameter: 44 mm

Weight:

(Including leather case)
 260 g (0,57 lb)

Accessories Included:

Adaptor for $1/2"$ microphones DB 0311
 Leather case KE 0065
 Battery 9V IEC 6F22 (B & K order No. QB 0010)

Accessories Available:

$1/2"$ to $1/4"$ Adaptor DB 0310
 $1/2"$ to $1/8"$ Adaptor DB 0352

2. OPERATION

2.1. GENERAL

The 4230 is designed for the calibration of 1" and 1/2" diameter microphones. An adaptor is placed over the opening for use with 1/2" microphones and is removed when 1" microphones are to be calibrated (Fig.2.1). The Calibrator should be stored and operated in its leather case.



Fig.2.1. Sound Level Calibrator Type 4230

The sound pressure level produced by the 4230 is 94 dB re $20\mu\text{Pa}$. However, when calibrating a microphone which is to be used for free field measurements, a small correction is necessary to compensate for the difference between free field response at 0° incidence and the pressure response. The correction is $-0,4\text{ dB}$ for 1" free field microphones and $-0,2\text{ dB}$ for 1/2" free field microphones. This makes the effective calibration levels 93,6 dB and 93,8 dB re $20\mu\text{Pa}$ respectively. No correction is required when calibrating pressure response microphones.

Adaptors are available so that the B & K 1/4" and 1/8" microphones can be calibrated using the 4230. For 1/4" microphones, the adaptor DB 0310 is required. For 1/8" microphones both adaptors DB 0310 and DB 0352 are required. In each case the extra adaptors fit inside the 1/2" microphone adaptor supplied (DB 0311).

2.2. CALIBRATION PROCEDURE

Pressure Response		94 dB
Free Field Response	1 inch microphones	93.6 dB
	1/2 inch microphones	93.8 dB

Table 2.1. Indication required from measuring equipment for various microphone types

1. Select and fit the requisite adaptor to the 4230.
2. Place the 4230 snugly over the microphone.
3. Press the button on the 4230. A hold circuit maintains the signal for up to one minute (with a new battery) after the push button is released.
4. Adjust the sensitivity of measuring equipment to read the appropriate value (see Table 2.1).

2.3 REPLACEMENT OF BATTERY

If the calibration signal lasts only a few seconds after the push-button on the 4230 has been released then the battery needs replacing. To do this, the 4230 is taken out of its leather case and the bottom part of the calibrator housing is unscrewed, exposing the battery. (Fig.2.2). The battery is a 9 V type IEC 6F 22 or NEDA 1604 and has the B & K order number QB 0010.

The battery is replaced and the 4230 reassembled.



Fig.2.2. 9 V Battery installed in the Calibrator

2.4. LEATHER CASE

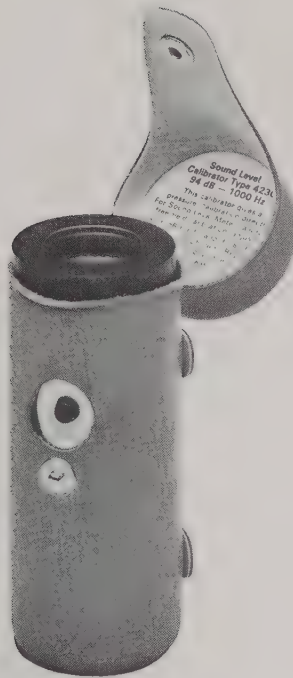


Fig.2.3. Calibrator in its Leather Case

The leather case which is supplied with the 4230 is designed to protect it and is best left on the instrument except when changing the battery. The case is padded to protect the instrument against shocks. The case also protects against dust and the effects of sudden temperature changes, such as holding a cold 4230 in a warm hand while performing a calibration. (Fig.2.3.)

3. CHARACTERISTICS

3.1. INFLUENCE OF TEMPERATURE AND PRESSURE

The influence of atmospheric pressure variations on the sound pressure level produced by the 4230 is shown in Figs.3.1 and 3.2. Fig.3.1 shows the quantity which must be added to the basic $\pm 0,3$ dB uncertainty in the calibration for pressures from 500 mbar. Fig.3.2 shows the influence of the high pressure environments on the operation of a number of 4230's.

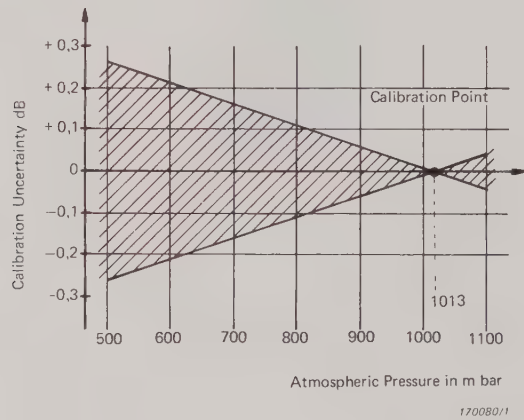


Fig.3.1. Calibration Error Caused by Variations in Atmospheric Pressure at 25°C

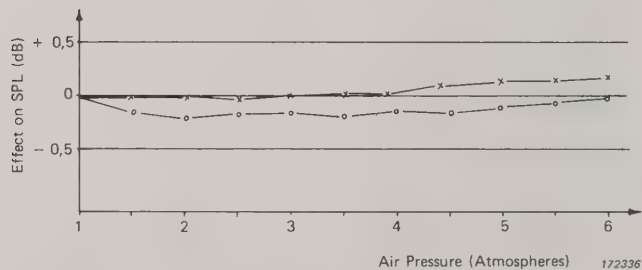


Fig.3.2. Influence of Atmospheric Pressure on SPL of Typical Sound Level Calibrator Type 4230 (1 Atmosphere = 1013 mbar)

The influence of the ambient temperature on the basic $\pm 0,3$ dB uncertainty in the calibration is shown in Fig.3.3.

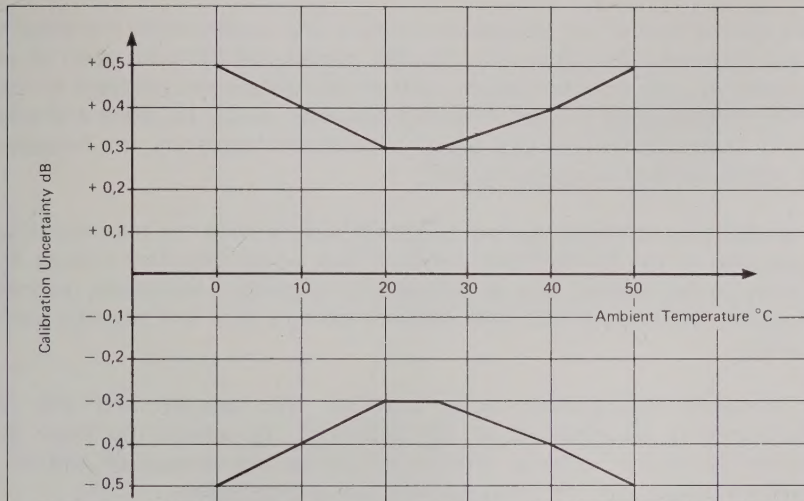


Fig.3.3. Calibration uncertainty at 1013 mbar due to variation in ambient temperature

Example

A calibration is to be performed at a temperature of 5°C and an atmospheric pressure of 950 mbar. From Figure 3.3, the temperature dependent calibration uncertainty is $\pm 0,45$ dB. From Figure 3.1, the additional uncertainty due to the atmospheric pressure is $\pm 0,03$ dB. The total uncertainty when calibrating at 950 mbar and 5°C is therefore $\pm 0,48$ dB.

3.2. DESCRIPTION AND EQUIVALENT CIRCUIT

A cross-sectional view of the Calibrator is shown in Fig.3.4. It consists of a Zener stabilized oscillator which delivers current via a potentiometer to a piezoelectric crystal. The crystal is soldered onto a metallic suspension system, which is designed so that its influence on the stiffness of the crystal is minimized. The force generated by the crystal is transformed by a conical nickel-membrane to a sound pressure in the coupler to which the microphone is subjected.

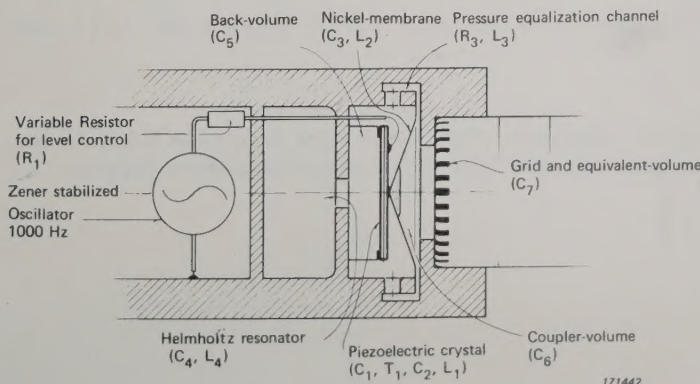


Fig.3.4. Cross sectional view of the 4230

The conical part of the membrane forms a stiff piston while the plane edge of the membrane is elastic. To obtain low acoustic impedance from the point of view of the coupler volume, the moving mechanical parts of the system are adjusted to resonate at 1000 Hz which is the signal frequency of the Calibrator. Since the mass and stiffness of the membrane and crystal would give a higher resonant frequency, the frequency can be lowered by adding a mass to the membrane.

It is desirable to eliminate the cavity stiffness behind the membrane since it changes proportion to the atmospheric pressure and would therefore influence the resonant frequency of the system. This is achieved by coupling a Helmholtz resonator (with resonant frequency 1000 Hz) to the back volume, giving a very low acoustic impedance at this frequency.

A pressure equalization canal between the coupler and the cavity behind the membrane is incorporated in the calibrator, to reduce the large pressure variations caused by "piston" effects, when microphones are coupled on and off, which could otherwise damage both the Calibrator and the microphones.

An equivalent circuit for the above mentioned elements is shown in Fig.3.5. The impedance analogy has been used, i.e. mechanical or acoustic mass is replaced by an inductance, compliance ($1/\text{stiffness}$) by capacitance, and damping by electrical resistance. The dimensions of the single elements are determined partly by calculation and partly by transferring the given mechanical and electrical data of the crystal to acoustical units taking into consideration the area of the membrane through which the real acoustical elements are coupled.


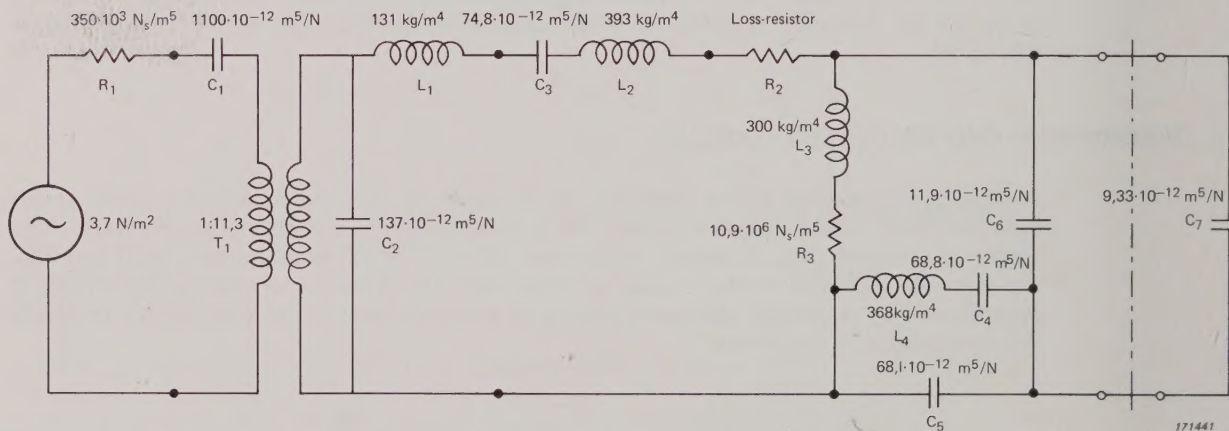


Fig.3.5. Equivalent electrical circuit diagram for 1013 mbar and 25°C

For further discussion of the equivalent circuit see B & K Technical Review 1971 No. 4 "Acoustical Calibrator Type 4230 and its Equivalent Diagram".

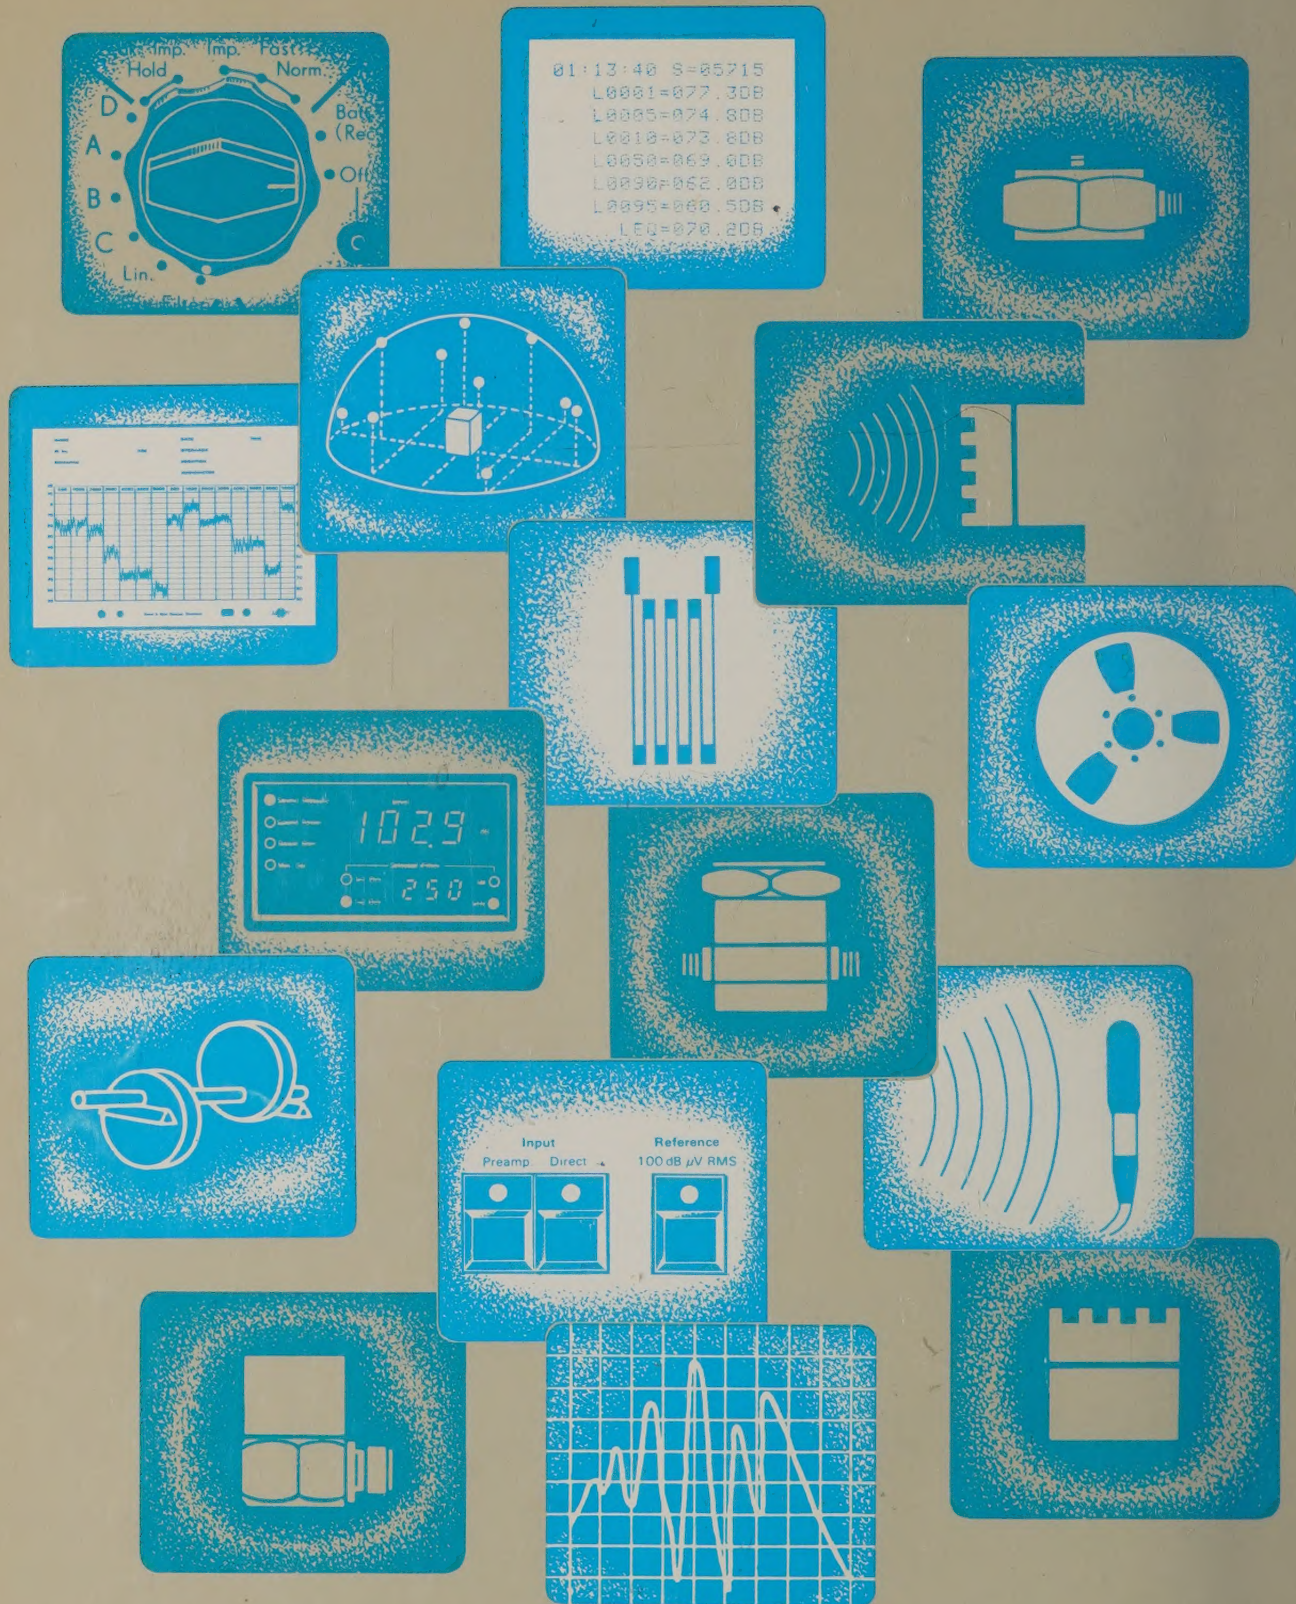

Brüel & Kjær

DK-2850 NÆRUM, DENMARK · Telephone: + 45 2800500 · Telex: 37316 bruks dk

Printed in Denmark by Nærum Offset